




Indirect Hi-Flo

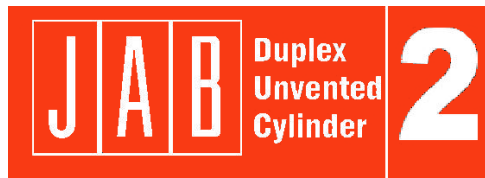

400-500L	32°	0°	32°
200-300L	38°	0°	38°

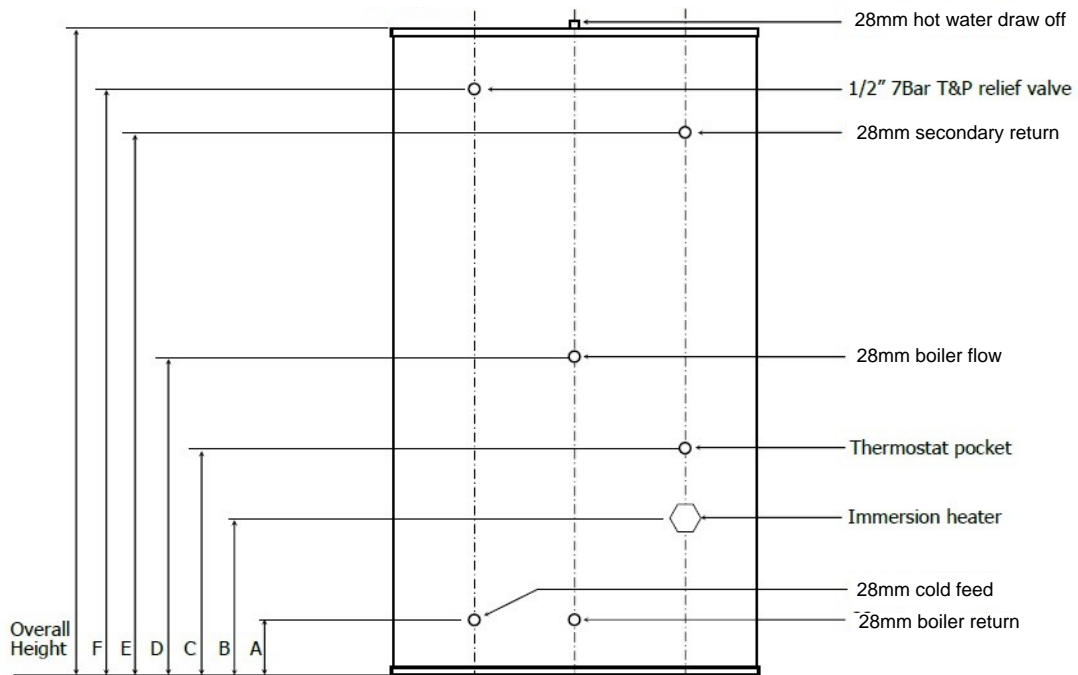

Capacity (L)	200	250	300	400	500
Height (mm)	1125	1500	1800	1600	1850
Diameter (mm)	580	580	580	710	710
A (mm)	195	195	195	240	240
B (mm)	225	225	225	270	270
C (mm)	475	555	555	640	640
D (mm)	815	975	1255	870	890
E (mm)	930	1140	1435	1240	1390

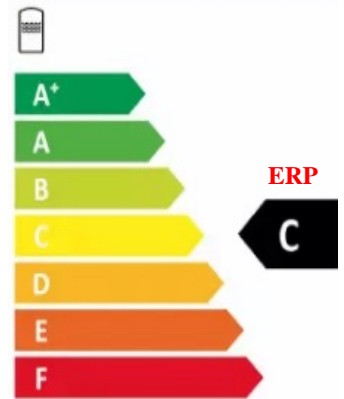

Cap (L)	Time to re-heat from cold	Time to re-heat from 75% draw-off with Boiler
200Ltr	33 Min	24 Min
250Ltr	35Min	25 Min
300Ltr	40Min	29 Min
400Ltr	45min	35 Min
500Ltr	50min	40 Min

Cap (L)	24Hrs Standing Heat Loss	Immersion Heater
200Ltr	2.45Kw/24Hrs	1x 3Kw 240v single phase
250Ltr	2.69Kw/24Hrs	1x 3Kw 240v single phase
300Ltr	2.71Kw/24Hrs	1x 3Kw 240v single phase
400Ltr	2.94Kw/24Hrs	2x 3kw 240v Single phase
500Ltr	3.15Kw/24Hrs	2x 3Kw 240v Single phase

