

Hi-MO X10

LR7-72HVD

650~660M

THE **smarter**
AWARD 

- Suitable for Distribution Market
- Peak efficiency with top power generation performance
- TaiRay wafer & BC technology enhances high product reliability
- More suitable for industrial and commercial cement roofs and high temperature scenarios



30-year Warranty for
Extra Linear Power Output



15-year Warranty for
Materials and Processing

Complete System and

Product Certifications

IEC61215, IEC 61730

ISO9001: Quality Management System

ISO14001: Environment Management System

ISO45001: Occupational Health and Safety Management System

IEC62941: Quality System for PV Module Manufacturing

LONGI SOLAR




LR7-72HVD

BC-CELL
LOWER OPERATING
TEMPERATURE

Year	Percentage
1999	99%
2000	95.85%
2001	92.35%
2009	88.85%

Cell Orientation	144 (6×24)
Junction Box	IP68
Output Cable	4mm2, +400, -200mm/±12 00mm length can be customized
Glass	Dual glass, 2.0+2.0mm semi-tempered glass
Frame	Anodized aluminum alloy frame
Weight	33.5
Dimension	2382×1134×30mm
Packaging	36pcs per pallet / 144pcs per 20' GP / 720pcs per 40' HC

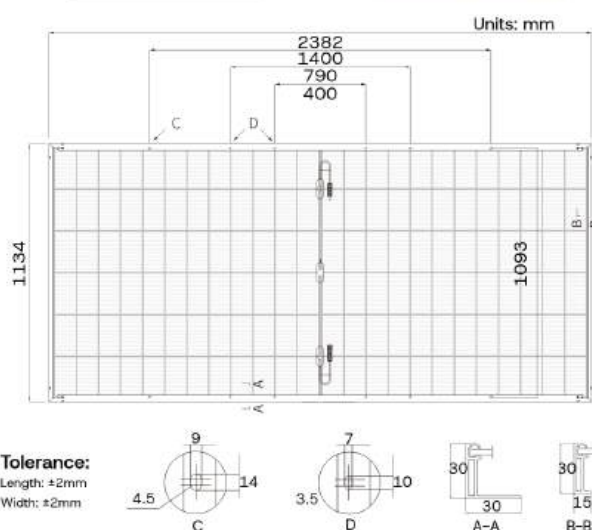

Test uncertainty for $P_{max} \pm 3\%$

Module Type	STC P-AM15 1000W/12V DC		NOCT P-AM15 600W/12V DC 117/5		Test Uncertainty for Pmax ±0.7%	
	LR7-72HVD-650M		LR7-72HVD-655M		LR7-72HVD-660M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	650.0	494.8	655.0	498.6	660.0	502.4
Open Circuit Voltage (Voc/V)	54.22	51.53	54.32	51.62	54.42	51.72
Short Circuit Current (Isc/A)	15.14	12.16	15.22	12.22	15.3	12.29
Voltage at Maximum Power (Vmp/V)	44.87	42.64	44.97	42.74	45.07	42.83
Current at Maximum Power (Imp/A)	14.49	11.61	14.57	11.68	14.65	11.75
Module Efficiency(%)	24.4		24.2		24.4	

Pmax /W	Voc/V	Isc /A	Vmp/V	Imp /A	Pmax gain
677.0	54.12	15.81	44.77	15.13	0.05
710.0	54.12	16.57	44.77	15.85	0.1
744.0	54.22	17.32	44.87	16.57	0.15
776.0	54.22	18.07	44.87	17.29	0.2
808.0	54.22	18.83	44.87	18.01	0.25

Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	IEC Class C

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Pmax	-0.200%/°C