

Oil Filled Radiator



Programmable oil filled electric radiators are accurate with fast acting control. More efficient than a regular panel heater thanks to the high thermal inertia fluid and intelligent thermostatic control.

- Electronic thermostat with LCD display.
- 7-day programmable heating schedule.
- Manual temperature setting.
- Open window detection and optimum start.
- Efficient thermal fluid.
- Made of die cast aluminium.

Technical data

Voltage	230V AC 50Hz
IEC protection	Class I
Protection rating	IP20
Cable length	1.5m (white)
Wiring connection	Hard wire
Country of origin	Spain
Warranty	5 years

Available outputs

Code	Output (W)	BTU/h	Amps (A)	Max area (m ²) <i>Low Insulation</i>	Max area (m ²) <i>High Insulation</i>	Weight (Kg)	Colour
TSR-0500-A	500	1706	2.2	3	5	7.4	White
TSR-0800-A	800	2728	3.4	5	8	11.1	White
TSR-1000-A	1000	3412	4.4	6	10	12.8	White
TSR-1300-A	1300	4436	5.7	8	13	16.9	White
TSR-1500-A	1500	5118	6.5	9	15	18.7	White
TSR-2000-A	2000	6820	8.7	12	20	24.6	White


Dimensions

Model	W (mm)	H (mm)	D (mm)	Fins
TSR-0500-A	355	590	95	3
TSR-0800-A	505	590	95	5
TSR-1000-A	595	590	95	6
TSR-1300-A	745	590	95	8
TSR-1500-A	835	590	95	9
TSR-2000-A	1075	590	95	12



Anatomy of an oil filled radiator

- The aluminium heating fins conduct the heat away from the element and oil and are shaped to aid the convection heating effect.
- Digital controls are at the top of the right hand side panel, under a hinged cover.
- The cable is situated at the bottom of the right hand side panel.
- The ambient temperature sensor is at the bottom of the right hand side panel.

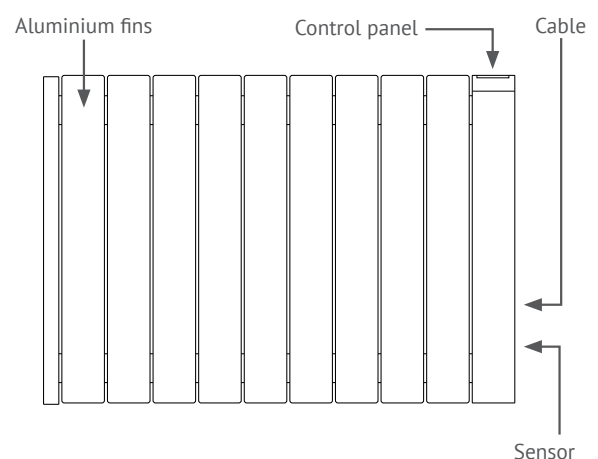

ThermoSphere manufactures underfloor heating products in Marden, Kent. However, some accessory products are imported from trusted sources, when it's not directly manufactured, you'll find the country of origin stated. For more information, please visit our website.