


# R290 Floor Standing All In One Hot Water Heat Pump

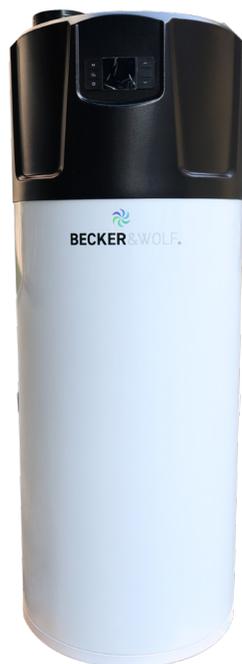

- \*R290 refrigerant, environmentally friendly
- \*Water tank capacity: 200/250/300L
- \*Energy class:A+
- \*High water output temperature up to 75°C
- \*Wifi Smart control-works with the Becker & Wolf App
- \*With Magnesium rod for water purification
- \*With back up electric heater
- \*Top inlet and top outlet design suitable for indoor installation

Model Number	BWHP200R290	BWHP250R290	BWHP300R290
Product Barcode	5061085070017	5061085070024	5061085070031
Power Supply	220-240V/1/50Hz	220-240V/1/50Hz	220-240V/1/50Hz
Rated Heating Capacity (kW)	2.8	2.8	2.8
Refrigerant	R290	R290	R290
Tapping Cycle	XL	XL	XXL
Energy Efficient Class	A+	A+	A+
Energy Efficient nwh (%)	145.7	147.6	147.6
COP EN16147	3.677	3.691	3.691
COP Non EN	4.45	4.45	4.45
Tank Capacity	200	250	300
Air Flow (M3/h)	450	450	450
Air Discharge	Vertical	Vertical	Vertical
Air Duct Diameter	150□	150□	150□
Aux Electric Heater (kW)	2	2	2
Default Water Temperature	55° C	55° C	55° C
Working Temperature range	-7-43°C	-7-43°C	-7-43°C
Unpacked Dimension (L*W*H)	Φ620 * 1650	Φ620 * 1880	Φ620 * 2050
Packed Dimension (L*W*H)	700 * 700 * 1755	700 * 700 * 1985	700 * 700 * 2155
Net Weight (kg)	98	105	117
Gross Weight (kg)	116	118	137
Noise dB(A)	48	48	48
Rated hot water production (L/h)	60	60	60
Rated Power Input (W)	630	630	630
Rated Current Input (A)	2.8	2.8	2.8
Power Input Max (W)	3000	3000	3000
Current input max (A)	13.3	13.3	13.3
CO2 Equivalent	0.00135t	0.00135t	0.00135t
Maximum Allowable Pressure (Mpa)	3	3	3
IP Class	IPX1	IPX1	IPX1
Water Piping connections	DN20	DN20	DN20
Rated working pressure of tank (Mpa)	0.8	0.8	0.8