

A complete product for hanging expansion vessels up to 25 litres attached to the water supply and to the wall. As the conventional Flexconsole but including accessories.

Advantages

- Equipped with a wall plate with two slots for accurate wall mounting.


Technical Specifications

- Supplied with:

Flexcon pressure gauge (0 - 4 bar) with shut off valve,
 Flexvent $\frac{3}{8}$ " floatvent with shut off valve,
 Safety valve $\frac{1}{2}$ " (set pressure: 3 bar),
 Flexfast quick-release coupling,
 Fixing set.



| | | |
|-------------|---------------------------------------|--------------------|
| Description | Flexconsole Plus 3/4 exp.vessel 8-25L | |
| Order Code | 27996 | |
| GTIN | 8712874279964 | |
| Model | <u>Flexconsole Plus</u> | |
| Connection | A | Rp $\frac{3}{4}$ " |
| | B | Rp $\frac{3}{4}$ " |
| Dimensions | C [mm] | 234 |
| | D [mm] | 275 |
| | E [mm] | 41 |
| | F [mm] | 236 |
| | G [mm] | 130 |
| | H [mm] | 50 |

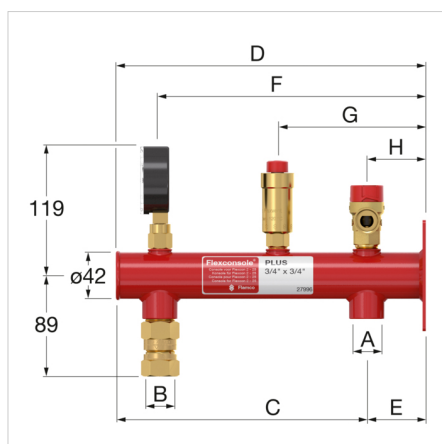



Classification General Data

| | |
|---------------------|--------------------------------------|
| Etim Group | Pressurization and expansion systems |
| Etim Class | Pressure expansion vessel console |
| Product Name | None |
| Brand | Flamco |
| Product Type | Vessel Mounting |
| Order Code | 27996 |
| GTIN | 8712874279964 |

Attributes

| | |
|---|---|
| Tank size | 2 - 25 l |
| With automatic de-aerator | Yes |
| With pressure gauge | Yes |
| Built-in pressure relief valve | Yes |
| With rapid coupling | Yes |
| Connection central heating | Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1) |
| Thread connection, tank | Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1) |
| Nominal diameter central heating | 3/4 inch |
| Size of tank thread connection | 3/4 inch |
| Length of support arm | 275 mm |
| Centre distance, connections 1 and 2 | 195 mm |

Find more information online:

[Flexconsole Plus DWG](#)

[Flexconsole Plus STEP](#)

[Flexconsole Plus RFA](#)

[Packaging data](#)

Washway Lane
UK-WA10 6PB, St Helens, Merseyside - gb

I flamco.aalberts-hfc.com/uk-en